

# Toward a Predictive Assessment of Stab-Penetration Forces

Aisling Ni Annaidh, PhD,\* Marie Cassidy, MD, FRCPath,† Michael Curtis, MD, FRCPath,‡  
Michel Destrade, PhD, DSc,\*‡ and Michael D. Gilchrist, PhD, DEng\*

**Abstract:** Collaborative research between the disciplines of forensic pathology and biomechanics was undertaken to investigate the hyperelastic properties of human skin, to determine the force required for sharp instrument penetration of skin, and to develop a finite element model, which reflects the mechanisms of sharp instrument penetration. These studies have led to the development of a “stab metric,” based on simulations, to describe the force magnitudes in stabbing incidents. Such a metric should, in time, replace the crudely quantitative descriptors of stabbing forces currently used by forensic pathologists.

**Key Words:** Stabbing, sharp force injury, forensic biomechanics, impact

(*Am J Forensic Med Pathol* 2015;36: 00–00)

## LEARNING OBJECTIVES

After completing this activity, the learner will be better able to:

1. Demonstrate their understanding of the mechanical properties of skin how it is nonlinear, anisotropic, and hyperelastic.
2. Discuss the key blade geometry parameters that affect stab penetration force.
3. Define the limitations associated with computational modeling techniques.

Stabbing is the commonest mode of homicide in Ireland and the United Kingdom,<sup>1</sup> and although proportionately less common than shootings, stabbings in the United States still account for 13.3% of homicides.<sup>2</sup> Furthermore, many instances of nonfatal stabbings occur, many of which go unreported to the authorities. Hitherto, forensic pathologists have responded to questions regarding the degree of force required to inflict stab wounds with expressions such as mild, moderate, considerable, and severe. Such responses can be interpreted by the courts to infer the harmful intent of an assailant and also to assess the feasibility of “run-on” scenarios.

Although the problem described here is unique to forensic pathology, it is clear that it could benefit from an interdisciplinary approach incorporating biomechanics. In recent years, the fields of biomechanics and forensic medicine have merged to form a new discipline, forensic biomechanics. This discipline has met the needs of the legal system in particular, with biomechanists increasingly acting as expert witnesses in a court of law.<sup>3</sup> In an

attempt to provide scientific quantitative assessments of the scale of force involved in stabbing incidents, we have undertaken collaborative pathological and biomechanics research. This has allowed the hyperelastic properties of human skin to be characterized, providing a new in vitro data set to researchers. The microstructural organization of collagen fibers in the dermis has been studied, allowing for the development of an anisotropic model of human skin. Experiments have been performed to determine the force required for sharp instrument penetration of human skin or skin substitutes at both quasi-static and dynamic speeds. From these studies, it has been possible to develop a finite element model reflecting the mechanisms of sharp instrument penetration of skin and also a stab metric (equation) to calculate force magnitudes in stabbing incidents.

Finite element analysis, originally developed in the 1940s as a tool for civil and aeronautical engineering, has become an invaluable tool in biomechanics over the last 3 decades.<sup>4</sup> In essence, this is a method for subdividing a complicated mathematical problem into a finite number of small component parts, or elements, which can be solved in relation to each other. The chief advantage of developing such a model is that once the development process is complete, the model can be used to investigate the influence of the many parameters associated with stabbing incidents and replace the need for complicated experiments.

## MATERIALS AND METHODS

Skin is the soft tissue that provides the most resistance to puncture, and therefore the mechanical properties of skin are of the utmost importance in this study. A series of in vitro uniaxial tensile tests and a histological investigation were performed to

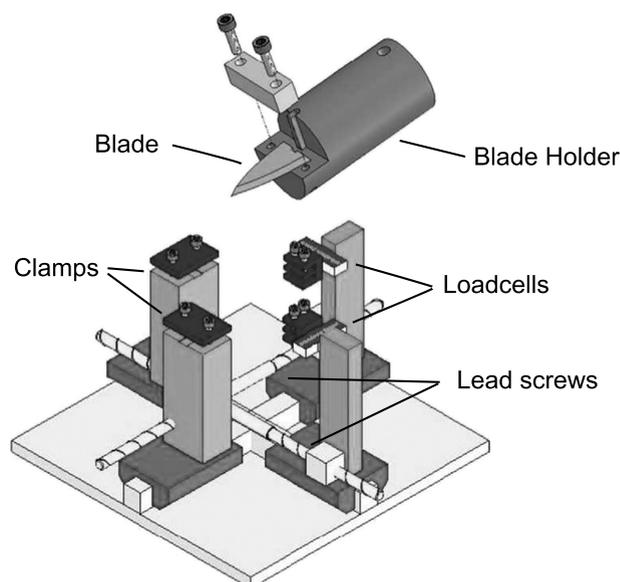


FIGURE 1. Illustration of blade holder and biaxial device.<sup>10</sup>

Manuscript received November 16, 2012; accepted January 18, 2013.  
From the \*School of Mechanical and Materials Engineering, University College Dublin, Belfield; and †Office of the State Pathologist, Fire Brigade Training Centre, Marino; and ‡School of Mathematics, Statistics and Applied Mathematics, National University of Ireland Galway, Galway, Ireland.


The authors report no conflicts of interest.

Reprints: Marie Cassidy, MD, Office of the State Pathologist, Fire Brigade Training Centre, Malahide Rd, Marino, Dublin 3, Ireland.  
E-mail: mcassidy@statepathology.gov.ie.

Copyright © 2015 Wolters Kluwer Health, Inc. All rights reserved.

ISSN: 0195-7910/15/3603-0000

DOI: 10.1097/PAF.0000000000000075

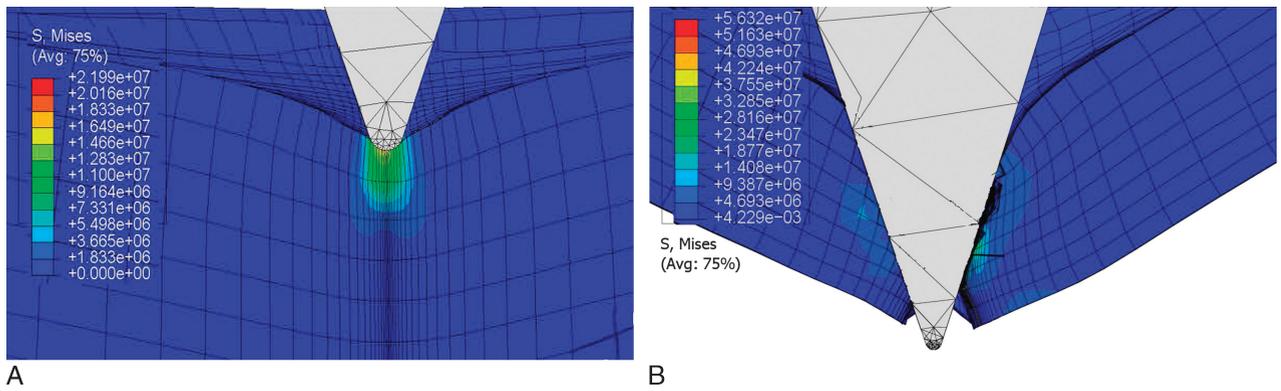

**FIGURE 2.** Numerical progression of a carving knife through human skin (units in Pa). A, indentation prior to initial penetration; B, full perforation.


characterize the mechanical behavior of human skin.<sup>5</sup> An algorithm was developed in MATLAB to automatically identify the orientation of collagen fibers in the dermis. These data provided sufficient information for the anisotropic modeling of human skin using the Gasser-Holzappel-Ogden hyperelastic model.<sup>6</sup>

A series of experiments was performed (1) to measure the force required for a blade to penetrate skin at various speeds, from 100 mm/min (quasi-static) to 9.2 m/s, consistent with the

typical maximum velocity of the arm in a stabbing motion<sup>7,8</sup> and (2) using different “sharp” implements.<sup>9</sup>

The setup consists of a biaxial tension device, a blade holder (shown in Fig. 1), and the test machine, which controls the speed of the descending blade onto skin.

Using the experimental results of both tensile tests and stab-penetration tests, a finite element model was developed that could replicate the stab-penetration experiments using

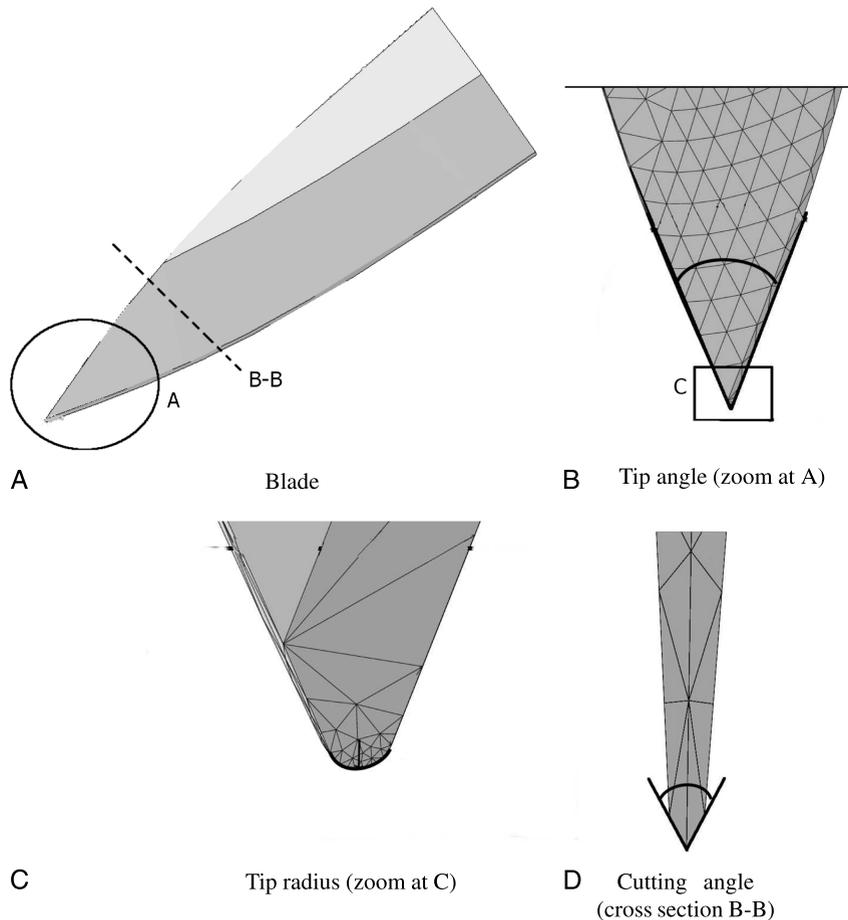

**FIGURE 3.** Indicative blade dimensions (A) blade, (B) tip angle (zoom at A), (C) tip radius (zoom at C), (D) cutting angle (cross section B-B).

ABAQUS (a nonlinear finite element analysis commercial package). 8000 C3D8R elements have been used to simulate the process. The failure mechanism used is one of element deletion and is shown in Figure 2. In this method, once the stress in an individual element exceeds a specified threshold, the element is deemed to have failed and is deleted from the model. In Figure 2A, the blade has deformed the skin, but no initial penetration has occurred, corresponding to the early

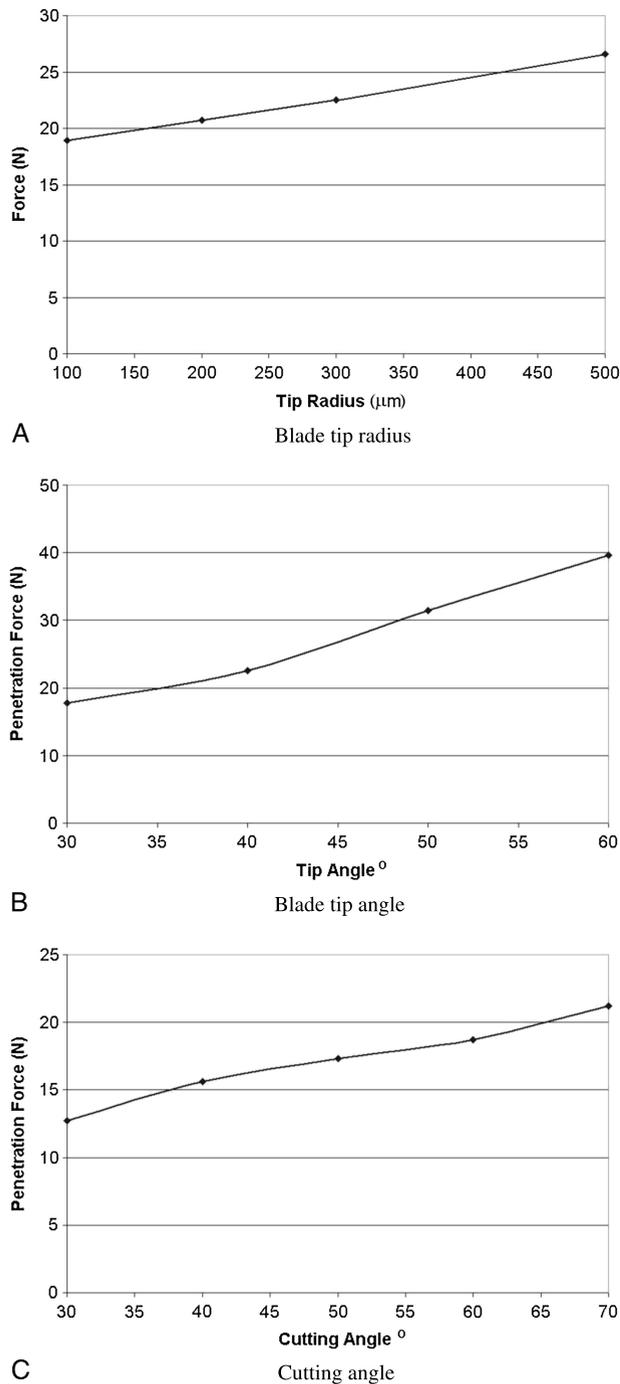


FIGURE 4. The maximum penetration force as a function of the characteristic blade dimensions.

TABLE 1. Evaluated Regression Coefficients Using Stab Metric

Coefficient	Value	Lower 95%	Upper 95%	P
$\beta_0$	-15.45	-20.42	-10.48	<0.001
$\beta_1$	0.016	0.0077	0.025	<0.001
$\beta_2$	0.69	0.56	0.81	<0.001
$\beta_3$	0.16	0.026	0.29	0.026

portion of the stab-penetration experiment. Once the threshold value of the failure criterion is reached in each element, those elements are deleted, and the blade progresses through the skin until full perforation of the skin occurs, shown in Figure 2B. The force required to fully perforate the skin is known as the penetration force.

Knight<sup>11</sup> claimed that the “sharpness” of the blade is by far the most important factor to consider with respect to penetration force. There is no doubt that the sharpness of the blade plays a major role in the level of penetration force during a stab incident, and yet, no author has quantified the effect of blade sharpness during a stabbing incident, although this has been done for cutting.<sup>12,13</sup> Although this is a difficult task experimentally, as controlled variation of blade tip geometry is almost impossible, numerically, it is quite possible to achieve. Using the finite element model, which has been verified and validated in Ní Annaidh,<sup>14</sup> the characteristic dimensions of the “carving” knife, shown in Figure 3, have been varied systematically.

RESULTS


Figure 4 displays the variation in penetration force while isolating each of the characteristic blade dimensions. All three characteristic dimensions have an almost linear relationship with the penetration force within the range examined here. It can be seen that the tip angle is the most important characteristic dimension, having the largest variation in penetration force over the chosen range. Because the tip angle and the tip radius are the regions that make the first contact with the skin, we expect these two dimensions to be dominant. The tip radius, however, is small, measuring between 100 and 500 µm, and once the blade indents beyond that distance, it is the tip angle that becomes the dominant dimension.

Development of Stab Metric

The results of stab-penetration simulations are now incorporated into a “stab metric,” which aims to predict the minimum penetration force for a given blade. Multiple linear regression techniques are used to fit the data to a statistical model. Multiple linear regression attempts to model the relationship between two or more independent variables, for example, tip radius, and so on, and a dependent variable, for example, force. It is assumed that the relationship between the independent variables and the dependent variable is linear and that the resulting residuals are normally distributed about the mean. The model is given by the following equation:

$$Y = \beta_0 + \beta_1 X_1 + \beta_2 X_2 + \beta_3 X_3 \tag{1}$$

where  $Y$  is the dependent variable,  $X_1$ ,  $X_2$ , and  $X_3$  are the three independent variables, blade tip radius, blade tip angle, and cutting angle, respectively, and  $\beta_0$ ,  $\beta_1$ ,  $\beta_2$ , and  $\beta_3$  are coefficients.<sup>15</sup> A total of 30 different simulations with varying blade dimensions were modelled. The fitting procedure was performed using the data analysis package available in Microsoft Excel.

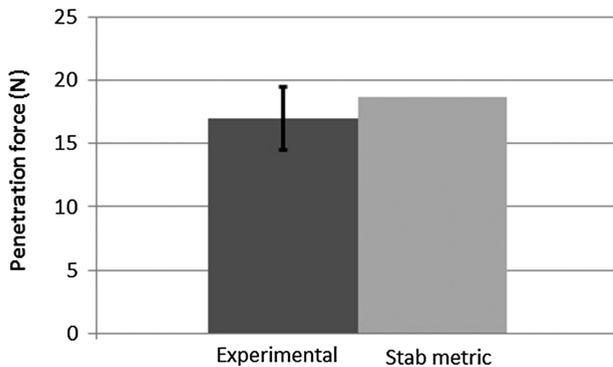

**FIGURE 5.** Comparison of experimental data for carving knife penetrating human skin at quasi-static speeds to the same stab-metric prediction.

The evaluated regression coefficients are given in Table 1 with the 95% confidence intervals and *P* values. The evaluated model is given by the following equation:

$$\text{Penetration force} = -15.45 + 0.016 \text{ TR} + 0.69 \text{ TA} + 0.16 \text{ CA} \quad (2)$$

where TR is the blade tip radius in micrometers, TA is the blade tip angle in degrees, and CA is the cutting angle in degrees. The penetration force has dimensions of Newtons in this form of the equation. The model was found to have an  $R^2$  value of 97.2%, which illustrates a good predictive capability of the model. A multiway analysis of variance was performed on the data revealing that each of the characteristic dimensions had a statistically significant effect (ie,  $P < 0.05$ ).

Figure 5 compares the stab-metric prediction of penetration force for a carving knife to the corresponding experimental data. It can be seen that the results of the stab metric compare favorably to the experimental data, lying within the bounds of the experimental standard deviation.

## DISCUSSION

A number of simplifying assumptions have been made in the development of this stab metric, which should be noted. The first is that while the finite element prediction is excellent at quasi-static test speeds, in its current form, it includes a hyper-elastic material model of skin and therefore cannot capture the velocity-dependent nature of skin, which sees skin behaving in a stiffer manner at higher velocities. The second simplification is that the presence of clothing has been ignored. Previous research carried out by the authors has revealed that the presence of clothing has a significant effect on the penetration force, with a single layer of denim increasing the penetration force by 50%.<sup>9</sup> Future work should aim to include this effect in the stab metric. A final simplification of the model is the representation of the flesh as skin alone. This is justified by the fact that skin offers the largest resistance to puncture until cartilage or bone is met.<sup>11</sup> The model could be extended in the future to include underlying bone and cartilage, which would enable the model to simulate the scenario where the blade has ruptured the skin and penetrated far enough to damage underlying bone (which is the case for 53% of stabbing cases<sup>16</sup>). Furthermore, combining these two models could have applications in other injuries, such as lacerations, where the skin is generally crushed between a blunt object and underlying bone.

A finite element model of human skin has been developed, which can accurately simulate a stabbing incident. This model has been used to quantify the influence of blade geometry on the penetration force. It has been shown that the three characteristic dimensions possess an almost linear relationship with the penetration force over the range investigated. The blade tip angle was found to be the most important dimension in establishing the penetration force of a given blade. Once the blade dimensions are known, the statistical stab metric developed here can be used to predict the minimum force required to penetrate bare human skin using a given blade. While the stab metric described here cannot yet be used for medicolegal purposes, it is hoped that even in its current form, it may prove to be a useful tool in forensic pathology by offering a quantitative assessment of a given blade.

## REFERENCES

1. Central Statistics Office. Garda Recorded Crime Statistics 2003–2007 tech. rep. CSO. 2009.
2. US Census Bureau. Crimes and crime rates tech. rep. USCB. 2010.
3. Freeman MD, Kohles SS. Applications and limitations of forensic biomechanics: a Bayesian perspective. *J Forensic Legal Med.* 2010;17:67–77.
4. Zienkiewicz OC. The birth of the finite element method and of computational mechanics. *Int J Num Methods Eng.* 2004;60:3–10.
5. Ní Annaidh A, Bruyère K, Destrade M, et al. Characterising the anisotropic mechanical properties of excised human skin. *J Mech Behav Biomed Mater.* 2012;5:139–148.
6. Ní Annaidh A, Bruyère K, Destrade M, et al. Automated estimation of collagen fibre dispersion in the dermis and its contribution to the anisotropic behaviour of skin. *Ann Biomed Eng.* 2012;40:1666–1678.
7. Miller SA, Jones MD. Kinematics of four methods of stabbing: a preliminary study. *Forensic Sci Int.* 1996;82:183–190.
8. Chadwick EKJ, Nicol AC, Lane JV, et al. Biomechanics of knife stab attacks. *Forensic Sci Int.* 1999;105:35–44.
9. Ní Annaidh A, Cassidy M, Curtis M, et al. A combined experimental and numerical study of stab-penetration forces. *Forensic Sci Int.* 2013;233:7–13.
10. Gilchrist MD, Keenan S, Curtis M, et al. Measuring knife stab penetration into skin simulant using a novel biaxial tension device. *Forensic Sci Int.* 2008;177:52–65.
11. Knight B. The dynamics of stab wounds. *Forensic Sci.* 1975;6:249–255.
12. McCarthy CT, Hussey M, Gilchrist MD. On the sharpness of straight edge blades in cutting soft solids: part I—indentation experiments. *Eng Fracture Mech.* 2007;74:2205–2224.
13. McCarthy CT, Ní Annaidh A, Gilchrist MD. On the sharpness of straight edge blades in cutting soft solids: part II—analysis of blade geometry. *Eng Fracture Mech.* 2010;77:437–451.
14. Ní Annaidh A. *The Mechanics of Stabbing: A Combined Experimental and Numerical Study of Sharp Force Injury* [PhD thesis]. Dublin, Ireland: University College; 2012.
15. Sheather SJ. Multiple linear regression. In: *A Modern Approach to Regression With R. Springer Texts in Statistics.* New York: Springer; 2009.
16. Banasr A, Grandmaison GL, Durigon M. Frequency of bone/cartilage lesions in stab and incised wounds fatalities. *Forensic Sci Int.* 2003;131:131–133.

## Questions

- The finite element method is an approximate mathematical technique used in engineering design problems. The accuracy of its solutions depends on
  - the accuracy of material properties used in model.
  - the number and density of elements used in model.
  - the accuracy with which boundary conditions and loads are defined.
  - all of the above
- Skin is an anisotropic material. This means that
  - it is equally stiff (compliant) in 3 orthogonal (principal) directions.
  - its stiffness (compliance) is different in 3 orthogonal (principal) directions.
  - it is equally stiff in the in-plane directions of the skin layer.
  - its through-thickness stiffness is half that of its in-plane stiffness.
- The force required for a knife to penetrate or perforate skin is related to which of the following blade characteristics?
  - tip radius, cutting angle, and tip angle
  - tip radius and cutting angle
  - cutting angle and tip angle
  - tip angle and tip radius
- The stab penetration force developed by NiAnnaidh et al is given by the following equation in which the units of force are newtons,  $TR$  is the blade tip radius (units of microns),  $TA$  is the blade tip angle (units of degrees), and  $CA$  is the blade cutting angle units of degrees):
 
$$\text{Force} = -15.45 + \frac{16TR}{1000} + \frac{690TA}{1000} + \frac{160CA}{1000}$$

Which of the following factors have been considered in developing this metric?

  - dynamic rate effects
  - effects of clothing on perforation
  - skin anisotropy
  - effects of tissue underneath the skin

## Answers

- D
- B
- A
- C